

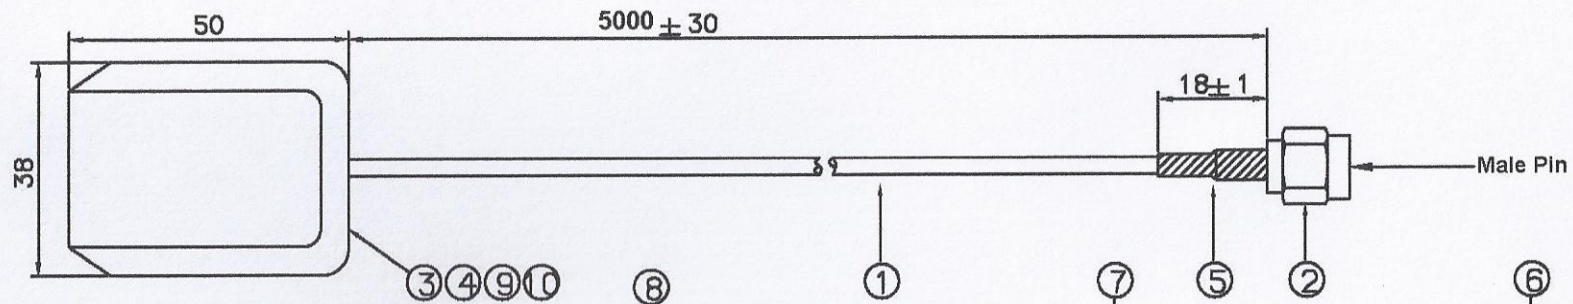


RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	2016.02.26	新订图面		梁森



工作频段 (Frequency Range)	1575.42~1581MHz
产品增益 (Product Gain)	28± 3dBi
测试增益 (Test Gain)	0± 5dBi
测试电压 (voltage)	3V
电流 (electric current)	10± 2mA
电压驻波比 (VSWR)	<2.0: 1
极化方式 (Polarzation)	Linear Vertical
特性阻抗 (Impedance)	50 ohm

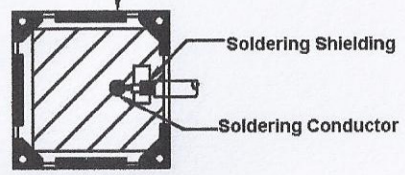

②	1801-0015	330*250*0.4(白边骨架)打孔	1/20	PE袋
①	1801-0002	130*105*0.4(白边骨架)无孔	1	PE袋
⑩	1601-0108	25.5*25.5*3.4 铁件	1	屏蔽盖
⑨	1801-0106	25*25*4 频率1568MHZ BD2+GPS	1	陶瓷件
⑧	1601-0105	28*28*0.8 28DB GPS+BD2 PCB板带滤波器	1	PCBA
⑦	1703-0032	18*1.8-单面磁铁	1	磁铁
⑥	1202-0137	49.5*37.5银光标签,单面含胶-银色	1	标签
⑤	1203-0074	4.0-BLACK-普通型 L=18mm	1	热缩套管
④	1201-0239	47.2*35.7*3.5黑色塑胶	1	GPS底座
③	1201-0238	50*38.0*9.5 黑色塑胶	1	GPS上盖
②	1101-0249	18.0*174-ZJ-焊针铆压	1	SMA
①	1301-0111	1.74黑-64 -PTFE(耐高温) 加密 L=5030MM	1	线材
No.	PART No.	Description	Qty	Name

角注 ANGLE PROJECTION		产品名称 (PRODUCT NAME)			
公差 GENERAL TOLERANCE		GPS Antenna-RG174-SMA(M) 5M			
100~200: ± 3.00		产品料号 (PRODUCT NO)	单位 (UNIT)	M M	比例 (SIZE)
50~100: ± 2.00		页码 (PAGE)		1 OF 1	幅面 (FORMAT)
25~50: ± 0.20		设计 (D S)		梁森	
10~25: ± 0.10		审核 (CHK)		AN3	
1~10: ± 0.05		核准 (APPD)			
Critical Dim					
Major					