


RoHS Compliant

REV	DATE	DESCRIPTION	NAME
A0	10-6-14	原始版本	聂玉龙
A1	10-8-14	2PCS1702-0036 1PCS1702-0036+1PCS1702-0012	回收久版

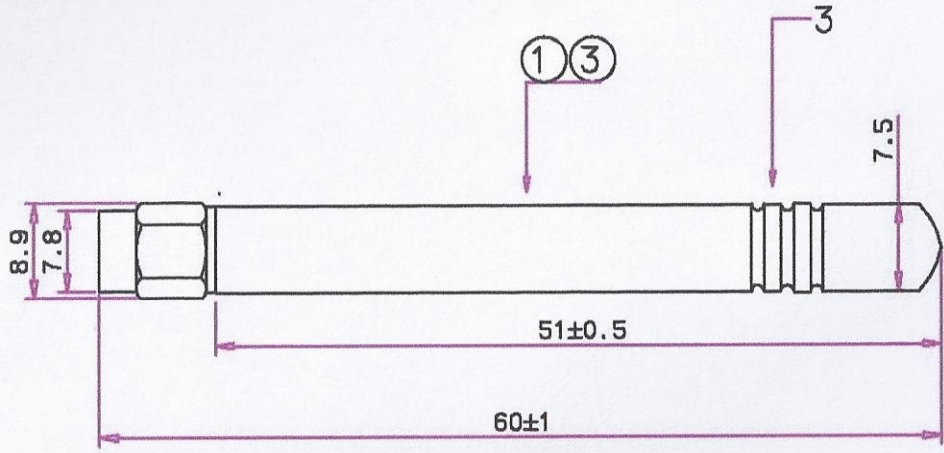

MECHANICAL SPECIFICATIONS	
Product Type	900/1800Mhz GSM Antenna
model Type	FYX-XJ-918W
Height	58mm
Max diameter	φ8.0mm
Min diameter	φ7.5mm
Connector	SMA S/T Plug
Lighting protection	Direct current
ELECTRICAL SPECIFICATIONS	
Product Type	900/1800MHZ
model Type	FYX-XJ-918W
Frequency Range	900/1800MHZ
Impedance	50 OHM
VSWR	<2.0
Gain	2.5dB
Polarization	Vertical
Radiation	Omnidirectional
Max power	50W

AC 60V
20-0hm
500 m-ohm

AC200V
50 Ohm

No.	Name	Description	Q'ty	Part No.
1	铜线	0.5*27-12N*3.2	1	1702-0036
2	SMA	17*8.0-ZJ-橡胶套	1	1101-0050
3	橡胶外套	5.7*7.7*51-黑色-有3槽	1	1201-0045
4	PE膜	135*105*0.4(白边骨架)打孔	1/20	1801-0002
5	PE膜	200*150*0.4(白边骨架)打孔	1/100	1801-0029
6	铜线	0.5*30-槽-2.48	1	1702-0012

	零件名称 (PART NAME) 规格	单位 (UNIT) mm	比例 (SCALE)	版本 (REV) A1	幅面 (SIZE) A4												
	客户料号 (CUST NO.)	产品名称 (PRODUCT NAME) GSM antenna-SMA 60mm		第1页,共1页													
<table border="1"> <tr> <td>公差 (TOLERANCE)</td> <td>公差 (TOLERANCE)</td> </tr> <tr> <td>0-1 ±0.1</td> <td>X ±0.1</td> </tr> <tr> <td>1-10 ±0.2</td> <td>X.X ±0.2</td> </tr> <tr> <td>10-100 ±0.5</td> <td>X.XX ±0.5</td> </tr> <tr> <td>100-500 ±1</td> <td></td> </tr> <tr> <td>500-5000 ±2</td> <td></td> </tr> </table>	公差 (TOLERANCE)	公差 (TOLERANCE)	0-1 ±0.1	X ±0.1	1-10 ±0.2	X.X ±0.2	10-100 ±0.5	X.XX ±0.5	100-500 ±1		500-5000 ±2		设计 DW.	图1日期 (CORRECTIONAL DATE) 2010-6-14		AN5	
公差 (TOLERANCE)	公差 (TOLERANCE)																
0-1 ±0.1	X ±0.1																
1-10 ±0.2	X.X ±0.2																
10-100 ±0.5	X.XX ±0.5																
100-500 ±1																	
500-5000 ±2																	
	审核 CHK.																
	批准 APPD.																

A B C D E F G